

150W Battery Charger ETC-150-48-2-P-LA



➤ Features:

- ECO SMART Technology: No load power consumption is negligible which Increase life of Battery.
- Din rail Mounting Charger.
- Protections: Reverse Battery/ Short Circuit / Over Load/ Over Voltage/Thermal Protection.
- Natural Air Cooled.
- Fully Isolated Aluminum Box
- Efficiency is up to 87%.
- 100% Full Load Burn in Test.
- Precise Current Limit at 10A.
- Float, Boost and Trickle current charging mode.
- High Operating Temperature up to 75°C
- Withstand 300VAC Surge Input for 5Sec
- Warranty: 1 year

❖ Applications:

- UPS & Invertor.
- LIFT ARD BATTERY CHARGER

Ergen Technovation Private Limited

CIN : U34300PN2022PTC210839 | GSTN : 27AAHCE0164H1ZS


Corporate Office : Sr.No.143, Opp. Greenfield Hotel, Sinhagad Road, Vadgaon Dhayari, Pune – 411041.

www.ergen.co | info@ergen.co


➤ **Description :**

ETC-150 is a Single Output 150W AC/DC SMPS type Charger with 3 Stage Charging Curve. The Battery Charger is compatible with GEL/AGM type Sealed Lead Acid Batteries. The Charger has various protections for Short-Circuit, Over-Load, Over-Voltage, Over-Current and Over-Temp. It operates over a Wide Temperature Range under free Air convection.

➤ **Model Encoding:**

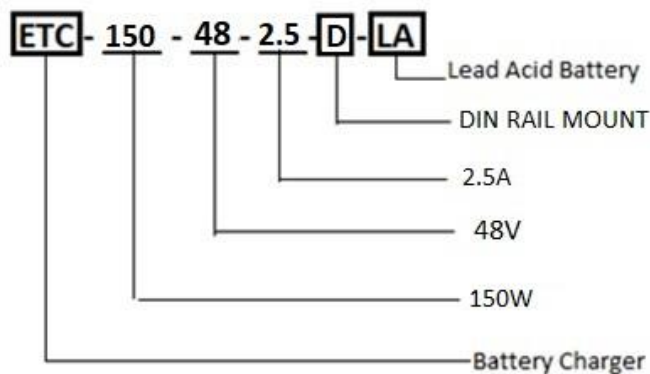

➤ **Block Diagram:**

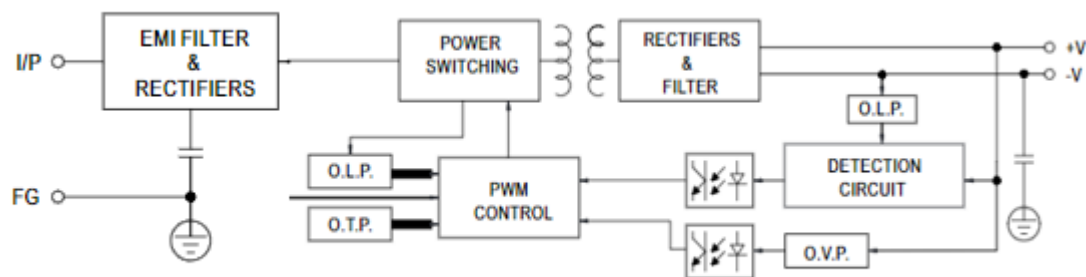

Ergen Technovation Private Limited

CIN : U34300PN2022PTC210839 | GSTN : 27AAHCE0164H1ZS

Corporate Office : Sr.No.143, Opp. Greenfield Hotel, Sinhagad Road, Vadgaon Dhayari, Pune – 411041.

www.ergen.co | info@ergen.co

➤ **Specifications:**

	MODEL	ETC-150-48-2-P-LA
OUTPUT	BOOST CHARGE VOLTAGE (Vboost)(default)	54.3V - 54.8V
	FLOAT CHARGE VOLTAGE (Vfloat)(default)	53.4V - 53.8V
	CHARGE VOLTAGE RANGE	36V ~ 60V
	OUTPUT CURRENT (FLOAT)	1 -2A
	OUTPUT CURRENT (BOOST)	1 -2A
	RATED POWER	145 W
	RECOMMENDED BATTERY CAPACITY (AMP HOURS)	5 ~ 15AH
	LEAKAGE CURRENT FROM BATTERY (typ.)	<1mA
INPUT	INPUT VOLTAGE RANGE	150 ~ 270 VAC
	FREQUENCY RANGE	47 ~ 63Hz
	EFFICIENCY (typ.)	87%
	AC CURRENT (typ.)	1.25A/115VAC ~ 0.63/230VAC
	INRUSH CURRENT (typ.)	COLD START 65A at 230VAC
	LEAKAGE CURRENT	<3.5mA / 240VAC
PROTECTION	SHORT CIRCUIT	Protection type: Shut down output voltage
	OVER VOLTAGE	Protection type: Shut down and Automatic power ON after recovery
	REVERSE POLARITY	By Relay
	OVER TEMPERATURE	Shut down O/P voltage, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMPERATURE	0 ~ +55 °C (refer to "Derating curve")
	WORKING HUMIDITY	20 ~ 95% RH non-condensing
	STORAGE TEMP., HUMIDITY	40 ~ +85°C , 10 ~ 95% RH non-condensing
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min/1cycle, 60min, each along X,Y,Z axes
OTHERS	MTBF	1726.4K hrs min. Telcordia SR-332 (Bell core); 206.1K hrs min. MIL-HDBK-217F (25°C)
	DIMENSIONS	180*100*55mm (L*W*H)
	PACKING	0.98kg; 10pcs/10.8kg /1.38CUFT

Ergen Technovation Private Limited

CIN : U34300PN2022PTC210839 | GSTN : 27AAHCE0164H1ZS

Corporate Office : Sr.No.143, Opp. Greenfield Hotel, Sinhagad Road, Vadgaon Dhayari, Pune – 411041.

www.ergen.co | info@ergen.co